


Stretched Bar Commercial LED Display



Rear panel view



Wrap LED panels around corners.

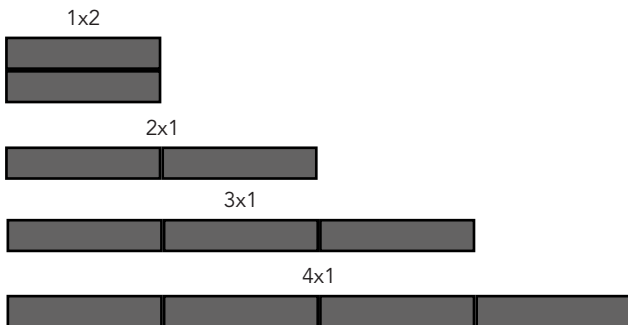

Customizable panel size.

InVue Stretched Bar LED Display Features

Ultimate Flexibility

With an aspect ratio of 32:9, panels are easy to be pieced together to play standard 16:9 videos.

Compact Design

Only 50mm thick and 7kg each.

Flexible Installation Options

Support for front or rear service, and can be wired horizontally or vertically. Panels can also be mounted around corners 90 degrees or greater.

Wide Viewing Angle

Super wide 160 degree viewing angle.

Perfect Image

No flicker, no brightline or darkline ensures a perfect image.

Auto Calibration

Each module automatically calibrates to precisely match neighboring modules.

Stretched LED Specifications

	2.6 mm	3.2 mm	4 mm
Pixel configuration	SMD 3-in-1 LED		
Pixel density (pixels/m²)	140625	97656	62500
Panel size (inch)	40.31(W) x 11.34(H) x 1.93(D)		
Panel size (mm)	1024(W) x 288(H) x 49(D)		
Panel resolution (W x H)	384x108	320x90	256x72
Panel material	Aluminum alloy and die-casting aluminum		
Weight (kg/pcs)	7		
Brightness (nit)	1000		1000/2000
Max. power consumption (W/m²)	540	540	450
Avg. power consumption (W/m²)	180	180	150
Horizontal/Vertical viewing angle (deg.)	160/160		
Refresh rate (Hz)	1920/2880/3840		
Gray level (bit)	12/14/16		
Brightness adjustment	Programmable/auto/manual		
Protection grade	IP30		
Other	Communication - level power supply(customization), hot double backup, temperature and humidity test, multi-signal input support, etc.		

Please note, specifications are for reference only. Please contact us for further details.

RoHS CE FC |   
 ISO 9001 ISO 14001

Free Product Consultation | Free Technical Support

Suite #206 16028 100A Ave. NW
Edmonton, AB

vuetronic.com
info@vuetronic.com