


Slim Mount Commercial LED Display



Front access modules

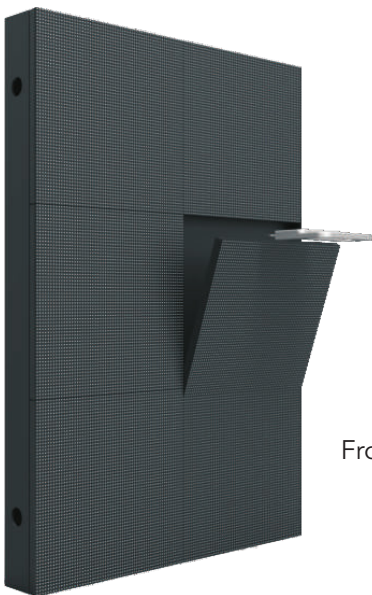

Indoor panel rear view



Outdoor panel rear view

ProVue Slim Mount LED Display Features

Ultra Slim & Light Panel

70mm extra-thin panel weighing 11kg-15kg.

Stress Free Maintenance

For indoor panels, module, power supply, receiving card can all be maintained from the front.

Brilliant Display

More than 1920Hz refresh rate, uniform color.

Wide Viewing Angle


Super wide 160 degree viewing angle.

Perfect Image

No flicker, no brightline ,or darkline ensures a perfect image.

Auto Calibration

Each module automatically calibrates to precisely match neighboring modules.

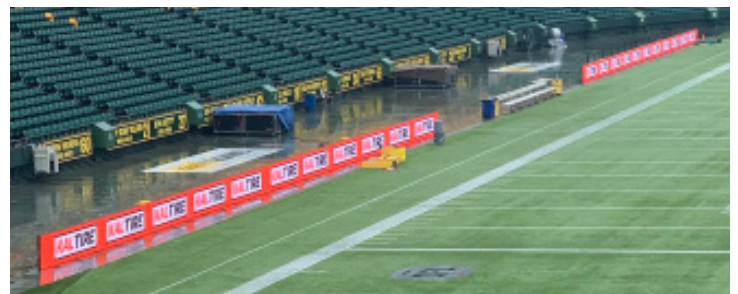

Slim Mount LED Specifications

	Indoor				Outdoor	
	2.9 mm	3.1 mm	3.9 mm	4.8 mm	3.9 mm	4.8 mm
Pixel Pitch	2.9 mm	3.1 mm	3.9 mm	4.8 mm	3.9 mm	4.8 mm
Pixel configuration	SMD 3-in-1 LED					
Pixel density (pixels/m ²)	112896	102400	65536	43264	65536	43264
Panel size (inch)	19.68(W) x 29.53(H) x 2.75(D)/ 19.68(W) x 39.37(H) x 2.75(D)					
Panel size (mm)	500(W) x 750(H) x 70(D)/ 500(W) x 1000(H) x 70(D)					
Panel resolution (W x H)	172x258/ 172x344	160x240/ 160x320	128x192/ 128x256	104x156/ 104x208	128x192/ 128x256	104x156/ 104x208
Panel material	Aluminum alloy and die-casting aluminum					
Weight (kg/m ²)	27-35					
Brightness (nit)	1000				5000	5500
Max. power consumption (W/m ²)	560	540	520	480	850	610
Avg. power consumption (W/m ²)	140	135	130	120	213	153
Horiz/Vert viewing angle (deg.)	160/160					
Refresh rate (Hz)	1920/2880/3840					
Gray level (bit)	12/14/16					
Brightness adjustment	Programmable/auto/manual					
Protection grade	IP20				IP65/54	
Serviceability	Front/Rear				Rear	
Other	Communication - level power supply(customization), hot double backup, temperature and humidity test, multi-signal input support, etc.					

Please note, specifications are for reference only. Please contact us for further details.

RoHS CE FC |   
 ISO 9001 ISO 14001

Free Product Consultation | Free Technical Support

Suite #206 16028 100A Ave. NW
Edmonton, AB

vuetronic.com
info@vuetronic.com