



Ultra Light Outdoor LED Display

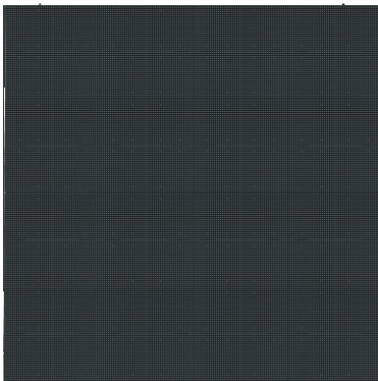

Panel Front view

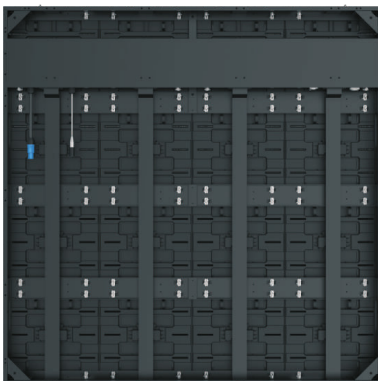

Panel rear view

Ultra Light Outdoor LED Display Features

Ultra Slim & Light Panel

105mm extra-thin panel.

Stress Free Maintenance

Module, power supply, receiving card can all be maintained from the front.

Brilliant Display

More than 1920Hz refresh rate, uniform color.

Wide Viewing Angle


Super wide 160 degree viewing angle.

Perfect Image

No flicker, no brightline ,or darkline ensures a perfect image.

Auto Calibration

Each module automatically calibrates to precisely match neighboring modules.

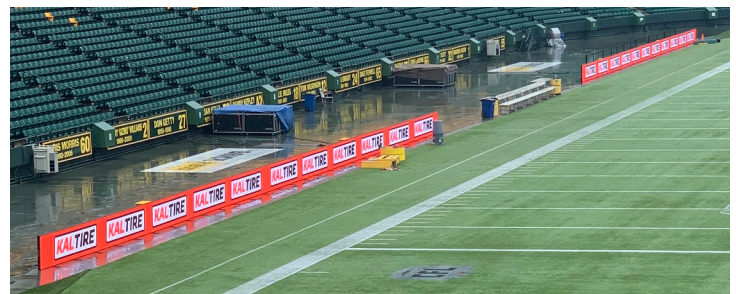

Slim Mount LED Specifications

Pixel Pitch	6.6 mm	8 mm	10 mm	16 mm
Pixel configuration	SMD 3-in-1 LED			
Pixel density (pixels/m ²)	22500	15625	10000	3906
Panel size (inch)	50.39(W) x 50.39(H)			
Panel size (mm)	1280(W) x 1280 (H)			
Panel resolution (W x H)	192 x 192	160 x 160	128 x 128	80 x 80
Panel material	Aluminum			
Weight (kg/m ²)	30			
Brightness (nit)	6500			
Max. power consumption (W/m ²)	890			
Avg. power consumption (W/m ²)	290			
Horiz/Vert viewing angle (deg.)	140/90			
Refresh rate (Hz)	1920			
Gray level (bit)	12/14/16			
Brightness adjustment	Programmable/auto/manual			
Protection grade	IP65/IP54			
Serviceability	Front			
Other	Communication - level power supply(customization), hot double backup, temperature and humidity test, multi-signal input support, etc.			

Please note, specifications are for reference only. Please contact us for further details.

RoHS CE FC | ISO 9001 ISO 14001 |
 



Free Product Consultation | Free Technical Support

Suite #206 16028 100A Ave. NW
Edmonton, AB

vuetronic.com
info@vuetronic.com