



InVue Golden Ratio 16:9

Classic Display Indoor Fixed


◆ Friendly 16:9 Cabinet

ultra friendly to assemble LED walls in 2k, 4k, 8k, etc.



◆ Slim & Lightweight

ultra-thin cabinet with 20kg/m² only

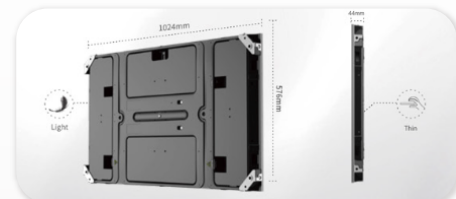

◆ Intelligent Modules (Optional)

built in with calibration data, can automatically retrieve data after module replacement

Specification

Pixel Pitch	1.6	1.9	2.6	4
Pixel density (pixels/m ²)	390625	255669	140625	62500
LED Package	SMD			
Module Size WxH (mm)	256*288			
Panel Material	Die-casting Aluminium			
Panel Size (mm)	1024*576*44.5			
Panel Weight (kg)	12			
Panel Resolution	640*360	520*290	384*216	256*144
Working Voltage (AC)	110-240V			
Brightness (nits)	700-800	700-800	700-800	800-900
Viewing Angle (h/v)	160° / 160°			
Grayscale (bit)	14-16			
Refresh Rate (Hz)	2880 / 3840	2880 / 3840	2880 / 3840	1920 / 3840
Contrast Ratio	8000:1	8000:1	6000:1	6000:1
Colour Temperature (K)	2000~10000			
Maximum Power Consumption (w/m ²)	570	480	480	480
Average Power Consumption (w/m ²)	142	120	120	120
Maintenance	Front			
Ingress Protection	Fron: IP30 / Rear: IP30			
Lifespan (H)	100000			
Certifications	CB, ETL, FCC, LVD, EMC, BIS, UKCA, KCC, BS476 Fire Resistance			

Please note, specifications are for reference only. Please contact us for further details.

RoHS CE FCC |   
 ISO 9001 ISO14001 | Intertek LISTED